

# 8G8D

## SPECIFICATIONS

|                              |                               |
|------------------------------|-------------------------------|
| Nominal Voltage (V)          | 12V                           |
| Capacity at C/100            | 265 Ah                        |
| Capacity at C/20             | 225 Ah                        |
| Capacity at C/5              | 188 Ah                        |
| Weight                       | 166.5 lbs. (76 kg)            |
| Plate Alloy                  | Lead Calcium                  |
| Posts                        | Forged Terminals & Bushings   |
| Container/Cover              | Polypropylene                 |
| Operating Temperature Range  | -76°F (-60°C) - 140°F (60°C)  |
| Charge Voltage @ 77°F (25°C) |                               |
| Cycle                        | 13.8 - 14.6 volts             |
| Float                        | 13.4 - 13.6 volts             |
| Vent                         | Self-sealing                  |
| Electrolyte                  | Sulfuric acid thixotropic gel |
| Terminal                     | S(SAE)                        |



Rated UN2794 - Wet, Filled with Acid

Made in the U.S.A. by East Penn Manufacturing Co, Inc.

Distributed by:

## Valve-Regulated, Gelled-Electrolyte Battery




## DIMENSIONS

*Inches (mm)*

|        |                                            |
|--------|--------------------------------------------|
| Length | 21.03 (534 mm)                             |
| Width  | 11.00 (279 mm)                             |
| Height | 9.89 (251 mm)<br><i>including terminal</i> |

**Gel Cycle Life vs Depth of Discharge at +25°C (77°F)  
Based on BCI 2-hour Capacity**

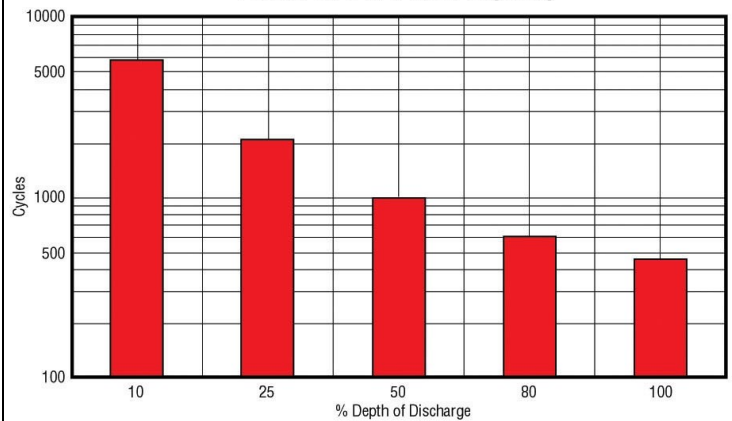

**MK Battery**

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: sales@mkbattery.com

